

Prüfadapter

FXB-CY-01-02 Prüfadapter für Rundzellen

Item number 1044564

General

| | |
|-----------------------|----------------|
| Type/family | FXB-CY-01 |
| Pitch (mm/mil) | 12,0 / 472 |
| Temperature [C°] | -45°C...+100°C |
| Additional definition | B |

Electrical specifications

| | |
|-----------------------------------|--------|
| Continuous current (A) | 100.00 |
| Typical contact resistance (mOhm) | 3.00 |
| Continuous current 2 (A) | 4.00 |

Mechanical specifications


| | |
|---------------------|---------|
| Preload (cN) | 170.00 |
| Spring force (cN) | 2000.00 |
| Nominal travel (mm) | 4.00 |
| Maximum travel (mm) | 5.00 |
| Thread | M5 |
| Tool size (mm) | 10 |

Dimensions

| | |
|--------------------------|-------|
| Total length (mm) | 43.70 |
| Projection height (mm) | 12.90 |
| Tip style diameter (mm) | 1.80 |
| Barrel diameter (mm) | 10.00 |
| Collar diameter (mm) | 11.00 |
| Press ring diameter (mm) | 11.00 |

Family drawing

All measurements are in mm.

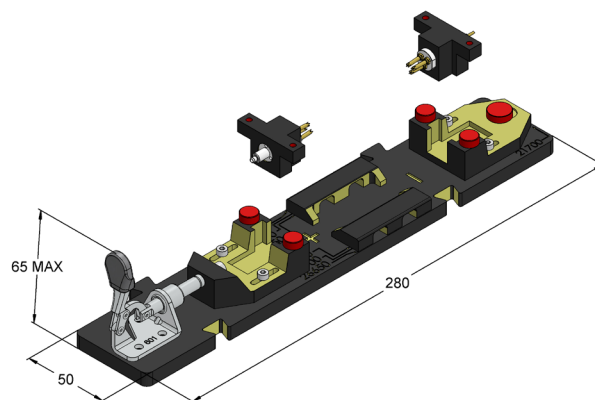

Materials & surfaces

| | |
|--------------------|------------------|
| Tip style | 21 |
| Tip style material | Beryllium cooper |
| Tip style plating | Gold |
| Plunger material | Cooper |
| Plunger plating | Gold |
| Barrel material | Brass |
| Barrel plating | Gold |
| Spring material | High-grade steel |
| Spring plating | Uncoated |

Accessories

| | |
|---------------------|--------------|
| Tool for receptacle | FDWZ-860C009 |
|---------------------|--------------|