



F724

Threaded Probe 100 mil Short travel Version

Centers (mm/mil)	2,54 / 100
Current	5,0 A
R typ	20 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	50	150

Travel (mm)

Version	Nominal	Maximum
Standard	3,5	4,5
Thread (M)		1,6
Wrench Size		1,7
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	BeCu, gold plated
Barrel	Brass, gold plated
Spring	Music wire, gold plated
Receptacles	Brass, gold plated

Accessories


Insertion tool receptacle	FEWZ-100E0
Screw-in tool probe max. Tip-Ø 2,0 mm	FWZ732 (T)

Drill Size (mm)

H722LA	1,99 - 2,00
--------	-------------

Projection Height (mm)

H722LA with F722	4,5
------------------	-----

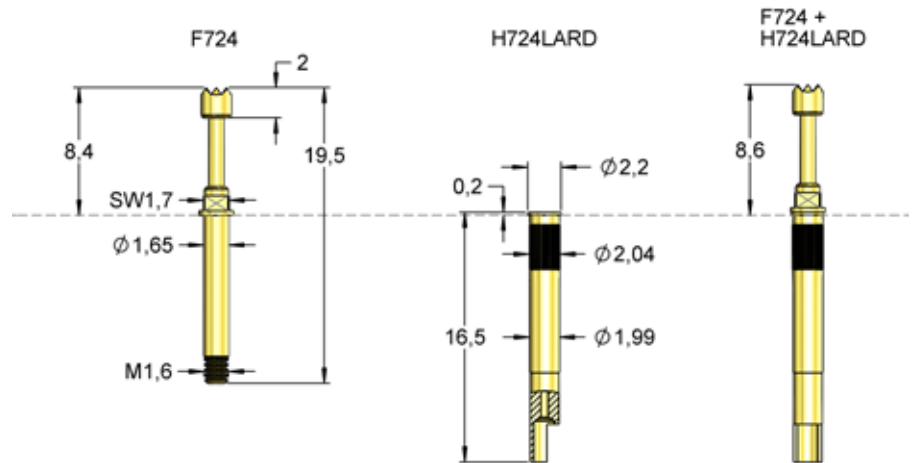

With its very short total length, the F724 can be used in limited spaces.

Order Code	Description	Tip Style	Number	Material	Plating	Ø in mm	Version	Screw-in Tool
1051111	F72406B200G150		06	B	G	2,00	-	FWZ732 (T)